

SIX NINE CONSTRUCTION (PVT) LTD

Complete Residential Construction Simulation Pack

Client budget: USD 500,000 | 15% protected margin | 36-week programme

Project reference: SNC-HOUSE-500K-001

Prepared for	Residential Client
Project	Private Residence Construction Simulation
Budget cap	\$500,000.00
Programme	36 weeks / 180 working days
Status	Simulation for feasibility, planning and client briefing

Executive Summary


Item	Detail
Objective	Simulate how a client with a USD 500,000 budget can deliver a complete private residence with controlled scope, phased procurement, weekly production targets, daily controls, and closeout documentation.
Assumed product	Turnkey 4-bedroom high-spec residence, approximately 400-430 m2 gross built area, with garage, external works, basic landscaping, MEP systems, security/data rough-in, and quality-controlled handover.
Commercial result	Quotation total is \$500,000.00. Protected gross profit is \$75,000.00, equal to 15.00% margin. Maximum internal cost is \$425,000.00.
Programme result	36 weeks from mobilisation to closeout, assuming approved drawings, clear site access, stable material supply, and no abnormal ground conditions.
Decision required	Client must approve final design, finishes schedule, provisional sums, authority route, payment milestones, and variation control before construction starts.

Core Assumptions and Exclusions

Item	Detail
Assumptions	Normal soil bearing, no rock blasting, no contaminated material, no flood mitigation works beyond standard stormwater, uninterrupted client approvals, and imported finishes available within normal lead times.
Exclusions	Land purchase, professional design fees before construction appointment, finance charges, abnormal authority fees, borehole drilling, swimming pool, solar plant, generator, premium imported appliances beyond allowance, and client-initiated variations.
Quality class	Durable high-spec residential finish, not ultra-luxury. Finishes are controlled through allowances to protect the budget.
Contract control	Fixed-scope price with provisional sums and a controlled variation register. No margin changes without written authorization.
Currency	All values are USD simulation values and should be revalidated against live supplier quotations before signature.

Quotation Summary

Cost Element	Amount	Comment
Direct BOQ works	\$385,000.00	Trade packages and measured works
Construction contingency	\$25,000.00	Held for measurable construction uncertainty
Management reserve	\$15,000.00	Commercial reserve held by project controls
Maximum internal cost	\$425,000.00	Internal spend ceiling used in this delivery plan
Protected gross profit	\$75,000.00	15% margin on client contract value
Quotation total	\$500,000.00	Client contract value

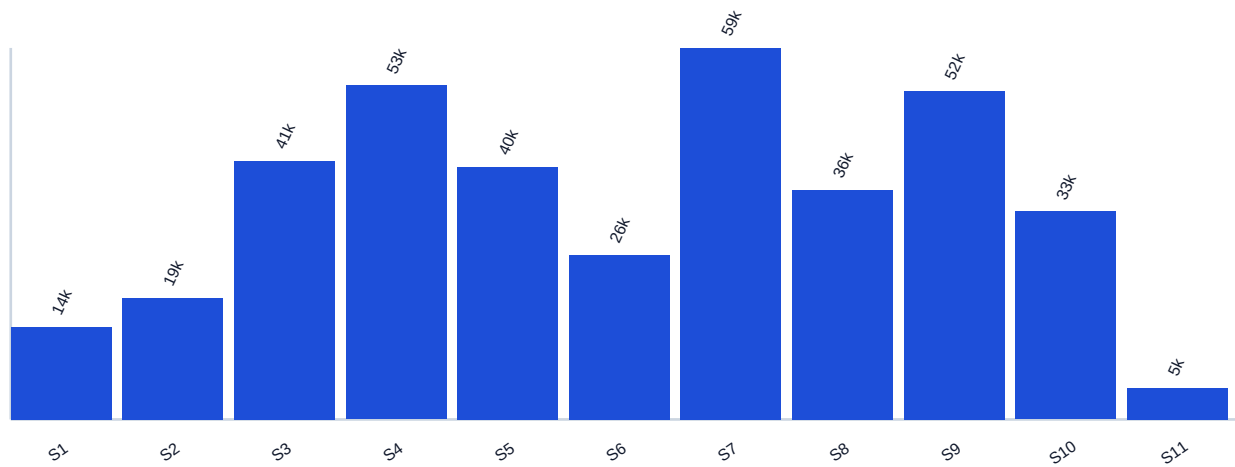

BOQ Section Totals

Section	Amount	% of Budget
Preliminaries	\$14,889.92	3.0%
Siteworks	\$19,513.85	3.9%
Substructure	\$41,612.05	8.3%
Superstructure	\$53,723.84	10.7%
Roofing	\$40,682.70	8.1%
Envelope	\$26,525.48	5.3%
Internal finishes	\$59,777.23	12.0%
Kitchen and bathrooms	\$36,958.89	7.4%
MEP	\$52,806.01	10.6%
External works	\$33,458.72	6.7%
Professional and closeout	\$5,051.31	1.0%
Contingency and reserve	\$40,000.00	Internal cost control
Protected profit	\$75,000.00	15.0% of contract value

Detailed Bill of Quantities

Code	Section	Description	Unit	Qty	Rate	Total
1.01	Preliminaries	Permits, setting out, temporary services, site offices	sum	1.00	\$9,837.98	\$9,837.98
1.02	Preliminaries	Insurance, compliance, security, HSE controls	sum	1.00	\$5,051.94	\$5,051.94
2.01	Siteworks	Clearing, grubbing, bulk earthworks and compaction	m2	1,850.00	\$6.38	\$11,803.00
2.02	Siteworks	Stormwater, soakaways and external drainage	sum	1.00	\$7,710.85	\$7,710.85
3.01	Substructure	Excavations, anti-termite treatment and cart-away	m3	420.00	\$20.21	\$8,488.20
3.02	Substructure	Reinforced concrete strip and pad foundations	m3	115.00	\$124.97	\$14,371.55
3.03	Substructure	Ground slab, damp proofing and mesh reinforcement	m2	430.00	\$43.61	\$18,752.30
4.01	Superstructure	Brick/block walls including lintels and wall ties	m2	1,320.00	\$25.53	\$33,699.60
4.02	Superstructure	Reinforced concrete columns, beams and ring beams	m3	58.00	\$218.03	\$12,645.74
4.03	Superstructure	Structural steel feature supports and fixings	ton	7.50	\$983.80	\$7,378.50
5.01	Roofing	Timber/steel trusses, bracing and roof framing	m2	510.00	\$38.29	\$19,527.90
5.02	Roofing	Roof covering, insulation, flashings and gutters	m2	510.00	\$41.48	\$21,154.80
6.01	Envelope	Aluminium windows and external glazed doors	m2	96.00	\$175.49	\$16,847.04
6.02	Envelope	Main entrance, garage doors and security ironmongery	sum	1.00	\$9,678.44	\$9,678.44
7.01	Internal finishes	Floor screeds, porcelain tiles and skirtings	m2	420.00	\$39.35	\$16,527.00
7.02	Internal finishes	Ceilings, bulkheads and cornices	m2	420.00	\$22.33	\$9,378.60
7.03	Internal finishes	Internal doors, wardrobes and joinery allowance	sum	1.00	\$20,473.63	\$20,473.63
7.04	Internal finishes	Painting, wall finishes and decorative coatings	m2	2,100.00	\$6.38	\$13,398.00
8.01	Kitchen and bathrooms	Kitchen cabinetry, countertops and appliances allowance	sum	1.00	\$22,334.87	\$22,334.87
8.02	Kitchen and bathrooms	Sanitaryware, vanities, mixers and accessories	sum	1.00	\$14,624.02	\$14,624.02
9.01	MEP	Electrical reticulation, DBs, lighting and power points	sum	1.00	\$20,473.63	\$20,473.63
9.02	MEP	Plumbing, hot water systems and pressure pumps	sum	1.00	\$15,847.12	\$15,847.12
9.03	MEP	HVAC and ventilation allowance	sum	1.00	\$8,774.41	\$8,774.41
9.04	MEP	Data, CCTV, access control and smart-home rough-in	sum	1.00	\$7,710.85	\$7,710.85
10.01	External works	Driveway paving, walkways and apron slabs	m2	520.00	\$24.46	\$12,719.20
10.02	External works	Boundary works, gates and perimeter lighting allowance	sum	1.00	\$11,965.11	\$11,965.11
10.03	External works	Landscaping, irrigation and final clean	sum	1.00	\$8,774.41	\$8,774.41
11.01	Professional and closeout	Testing, inspections, as-builts and handover manuals	sum	1.00	\$5,051.31	\$5,051.31
		Direct BOQ subtotal				\$385,000.00

Margin Protection Control Sheet

Control	Value	Rule
Client contract value	\$500,000.00	This is the selling price ceiling agreed with the client.
Required gross margin	15.0%	Profit must be protected before any discretionary upgrade is accepted.
Protected gross profit	\$75,000.00	This is not contingency. It is company profit.
Maximum internal cost	\$425,000.00	All labour, materials, subcontractors, plant, preliminaries and reserves must stay below this.
Direct works target	\$385,000.00	Measured BOQ delivery target after value engineering.
Construction contingency	\$25,000.00	Used only for approved construction risk, not client upgrades.
Management reserve	\$15,000.00	Released only by management approval.
Uncommitted cost buffer	\$0.00	If this falls below zero, margin is already under attack.

Ruthless commercial rule: every requested upgrade, acceleration, rework, delay, scope clarification, or specification change must be priced before execution. Do not absorb client-driven costs inside contingency. Contingency protects construction uncertainty; variation orders protect margin.

Required Materials and Supplier Price Targets - Set 1

Package	Material	Qty	Target Rate	Target Total	Supplier / Backup	Lead	Order
Earthworks	Diesel and plant fuel allowance	5,200.00 litre	\$1.45	\$7,540.00	Fuel supplier A Backup: Fuel supplier B	3d	W1
Concrete	Ready-mix concrete 25-30MPa	173.00 m3	\$112.00	\$19,376.00	Batch plant A Backup: Batch plant B	5d	W4
Concrete	Reinforcing steel	18.00 ton	\$980.00	\$17,640.00	Steel supplier A Backup: Steel supplier B	10d	W3
Masonry	Cement	1,850.00 bag	\$8.25	\$15,262.50	Cement distributor A Backup: Cement distributor B	5d	W5
Masonry	Blocks/bricks	62,000.00 unit	\$0.42	\$26,040.00	Block supplier A Backup: Block supplier B	7d	W4
Roofing	Roof trusses/framing	510.00 m2	\$28.00	\$14,280.00	Truss fabricator A Backup: Truss fabricator B	21d	W8
Roofing	Roof sheets/tiles, flashings, gutters	510.00 m2	\$43.00	\$21,930.00	Roof supplier A Backup: Roof supplier B	14d	W10
Envelope	Aluminium windows and glazed doors	96.00 m2	\$195.00	\$18,720.00	Aluminium fabricator A Backup: Aluminium fabricator B	28d	W8
Finishes	Porcelain floor and wall tiles	620.00 m2	\$24.00	\$14,880.00	Tile supplier A Backup: Tile supplier B	14d	W14

Required Materials and Supplier Price Targets - Set 2

Package	Material	Qty	Target Rate	Target Total	Supplier / Backup	Lead	Order
Finishes	Paint, primer and specialist coatings	2,100.00 m2	\$4.10	\$8,610.00	Paint supplier A Backup: Paint supplier B	5d	W18
Joinery	Kitchen, wardrobes and vanities	1.00 sum	\$39,000.00	\$39,000.00	Joinery contractor A Backup: Joinery contractor B	35d	W12
MEP	Electrical cable, DBs, conduits and fittings	1.00 sum	\$22,500.00	\$22,500.00	Electrical wholesaler A Backup: Electrical wholesaler B	10d	W12
MEP	Lighting, switches and smart-home rough-in	1.00 sum	\$13,500.00	\$13,500.00	Lighting supplier A Backup: Lighting supplier B	21d	W16
MEP	Plumbing pipes, valves, pumps and tanks	1.00 sum	\$18,200.00	\$18,200.00	Plumbing supplier A Backup: Plumbing supplier B	10d	W12
Bathrooms	Sanitaryware, mixers and accessories	1.00 sum	\$24,500.00	\$24,500.00	Sanitaryware supplier A Backup: Sanitaryware supplier B	21d	W15
External works	Pavers, kerbs and bedding material	520.00 m2	\$22.00	\$11,440.00	Paver supplier A Backup: Paver supplier B	10d	W22
External works	Boundary gate automation and external lights	1.00 sum	\$14,200.00	\$14,200.00	Gate/security supplier A Backup: Gate/security supplier B	21d	W21

Supplier RFQ and Price-Fetch Matrix

Step	Required control	Why it protects margin
1. Supplier master	Create approved supplier records with category, contacts, tax registration, payment terms, delivery area, warranty terms and compliance status.	Prevents buying from unverified suppliers who can fail quality, delivery or warranty obligations.
2. RFQ package	Issue the same BOQ/spec, drawing revision, delivery location, warranty requirement and validity period to every supplier.	Prevents false low prices caused by suppliers quoting different scopes.
3. Three-quote rule	Capture preferred, backup and challenger quotes for every critical material package.	Creates leverage and gives a replacement path if the first supplier fails.
4. Live price fetch	Pull prices from supplier portals/APIs where available; otherwise attach emailed PDFs and enter them into the quote register with expiry date.	Avoids stale rates. Every price must have a timestamp and source.
5. Price lock	Convert accepted supplier quote to purchase order before quote expiry, or trigger automatic reprice.	Stops supplier escalation from silently eroding profit.
6. Variance gate	If supplier price exceeds target by more than 3%, require management approval, substitution, scope reduction or client variation.	Forces a decision before margin is consumed.
7. Delivery and GRN	Match purchase order, delivery note, goods received note, and quality inspection before supplier payment.	Prevents paying for short, damaged, wrong-spec or late material.
8. Cost-to-complete	Update remaining material exposure every week against committed POs and unbought packages.	Shows margin risk before it becomes unrecoverable.

Material Margin Controls by Package

Package	Material	Margin control
Earthworks	Diesel and plant fuel allowance	Reconcile daily plant hours to fuel slips.
Concrete	Ready-mix concrete 25-30MPa	Lock pour rates before foundation and slab sequence starts.
Concrete	Reinforcing steel	No cutting list release without engineer-approved drawings.
Masonry	Cement	Weekly cement reconciliation against masonry and plaster output.
Masonry	Blocks/bricks	Reject under-strength/broken deliveries at gate.
Roofing	Roof trusses/raming	Shop drawings approved before fabrication deposit.
Roofing	Roof sheets/tiles, flashings, gutters	Confirm colour, gauge, coating warranty and wastage before order.
Envelope	Aluminium windows and glazed doors	Site measure after openings; client approval on finish before deposit.
Finishes	Porcelain floor and wall tiles	Client upgrades are variation orders, not contingency drawdowns.
Finishes	Paint, primer and specialist coatings	Approve paint schedule and sample wall before bulk purchase.
Joinery	Kitchen, wardrobes and vanities	Signed shop drawings and appliance list before manufacture.
MEP	Electrical cable, DBs, conduits and fittings	Material issue sheets matched to room-by-room point schedule.
MEP	Lighting, switches and smart-home rough-in	Client-selected fittings beyond allowance require signed VO.
MEP	Plumbing pipes, valves, pumps and tanks	Pressure-test before covering; supplier warranty captured.
Bathrooms	Sanitaryware, mixers and accessories	Finish/spec changes after order are client cost.
External works	Pavers, kerbs and bedding material	Reject off-colour batches; measure installed area weekly.
External works	Boundary gate automation and external lights	Commissioning certificate before final payment.

What Else Makes This Work Operationally

Mechanic	Minimum system requirement	Failure if missing
Supplier quote register	Stores quote source, date fetched, expiry, currency, VAT treatment, delivery cost, exclusions and attachment.	You cannot prove why a rate was used or recover price movement.
Procurement approval workflow	Blocks purchase orders above budget, expired quote, unapproved supplier, missing spec, or over 3% variance.	Buying happens emotionally and margin disappears package by package.
Variation order workflow	Every client upgrade, late decision, scope change, acceleration request or rework cause is priced and signed before execution.	Free work accumulates and the 15% profit becomes fiction.
Daily cost capture	Foreman captures labour hours, plant hours, material usage, delivery notes, photos and blockers every day.	You cannot see which day started the loss.
Weekly margin meeting	Compares planned spend/revenue/profit to actuals, committed POs, uncommitted exposure and risk events.	Problems are discovered after money is already spent.
Document control	Only current drawings/specs are buildable. Old revisions are blocked from procurement and site issue.	Rework and claims become impossible to allocate.
Inventory and wastage controls	Material receipts, stock on site, issues to crews, wastage and returns are logged.	Theft, waste and over-ordering become hidden margin leaks.
Payment discipline	Milestone claims are tied to measured progress, signed inspections and client payment calendar.	Cash flow breaks the programme even if the quote is profitable.
Closeout controls	Defects, warranties, manuals, certificates and retention are tracked from the start.	Final payment and retention get trapped at the end.

Programme Stress Test - Best, Expected and Delay Cases

Scenario	Duration	Protected Profit	Margin	Assumptions	Commercial Position
Best case	32 weeks / 160 workdays	\$75,000.00	15.00%	Drawings frozen before mobilisation, clean site, fast inspections, client decisions on time, long-lead suppliers locked by week 3, stable weather and no abnormal ground.	Do not discount the contract price for finishing early. Early completion protects overhead and gives capacity back to the business.
Expected case	36 weeks / 180 workdays	\$75,000.00	15.00%	Normal approvals, normal supplier lead times, manageable weather, standard rework allowance, client decisions made by the decision schedule.	Base quotation programme. Margin remains protected if spend follows the weekly cost ceiling and variations are signed before execution.
Delay case	44 weeks / 220 workdays	\$45,000.00	9.00%	Late drawings, slow client finish decisions, one authority inspection delay, supplier slippage on glazing/joinery, weather disruption and moderate productivity loss.	Issue delay notices and variation orders. Unrecoverable delay overhead beyond 36 weeks reduces gross profit unless recovered from the client.

Delay-case profit assumes unrecovered overhead burn of \$3,750 per delayed week after week 36. If delay is caused by client decisions, authority delay, scope change, abnormal ground or late information, the quotation must recover the cost through extension-of-time and variation mechanisms.

Schedule Driver Simulation Matrix

Driver	Best Case	Expected Case	Delay Case	Margin-Safe Response
Drawings and engineering	All IFC drawings, structural details and MEP layouts approved before week 1.	Minor clarifications handled through RFIs without stopping work.	Missing details stop procurement/site work and create rework risk.	No work from sketch or verbal instruction. Price drawing changes as variation orders.
Site conditions	Clean access, normal soil, no hidden services, no boundary dispute.	Minor ground adjustments handled inside measured BOQ quantities.	Rock, groundwater, soft spots, hidden services or access restrictions appear.	Stop, measure, photograph, engineer instruction, price before proceeding.
Authority approvals	Permits and inspections happen on first booked dates.	One or two inspection comments corrected without critical delay.	Permit, foundation, drainage, electrical or occupation approvals slip.	Separate contractor delay from authority delay; claim EOT and standing cost where allowed.
Crew capacity	Core trades available on planned dates with stable productivity.	Some trade overlap requires zone control but remains manageable.	Absenteeism, congestion, rework or subcontractor underperformance slows output.	Daily production review. Add crews/overtime only through approved recovery budget.
Supplier lead times	Glazing, roof, joinery, sanitaryware and electrical packages ordered before expiry.	Normal supplier slippage absorbed through resequencing.	Late or wrong-spec delivery blocks follow-on trades.	Use quote expiry tracker, backup supplier and back-charge/variation route.
Client decisions	Finishes, kitchen, lighting, tiles and sanitaryware approved by decision schedule.	Some choices are late but within procurement float.	Client upgrades or indecision affects procurement and completion.	Late decisions become time and cost variations. No free acceleration.
Weather	Dry conditions through earthworks, roof and external works.	Normal rain disruption contained within float.	Heavy rain delays earthworks, roofing, paving or landscaping.	Weather diary, photos, EOT notice and resequencing. Do not absorb abnormal delay.


How the 36-Week Baseline Was Built

Phase	Weeks	Logic
Mobilisation and design freeze	1-4	Allows contract setup, site possession, surveys, permits, long-lead procurement and HSE mobilisation before production risk
Groundworks and foundations	5-8	Covers site clearance, bulk earthworks, foundation excavation, reinforcement, concrete pours, drainage sleeves and inspection
Substructure and shell	9-13	Covers slab, masonry, columns, beams, ring beams, gables and roof-support readiness.
Roof and envelope dry-in	14-16	Gets the building weather-tight so internal works can start with lower damage/rework risk.
MEP rough-in and wet trades	17-20	Coordinates electrical, plumbing, HVAC, data/security, plastering, screeds and waterproofing before finishes.
Finishes	21-24	Tiles, ceilings, painting, joinery manufacture and internal finish sequencing.
Fit-out and external works	25-28	Second fix, kitchen, bathrooms, paving, gates, landscaping and external services.
Commissioning and authority readiness	29-32	Testing, snagging, inspections, as-builts and client walkthroughs.
Handover and closeout	33-36	Final clean, manuals, warranties, keys, final account, retention and maintenance setup.

Monthly Targets, Spend and Protected Profit

Month	Target	Deliverables	Spend	Revenue	Profit
1	Mobilise and lock design	Permits, setting out, procurement baseline, site establishment	\$30,600.00	\$36,000.00	\$5,400.00
2	Complete earthworks and foundations	Excavations, foundations, substructure inspections	\$45,900.00	\$54,000.00	\$8,100.00
3	Slab and structural shell	Ground slab, columns, beams, masonry to wall plate	\$52,700.00	\$62,000.00	\$9,300.00
4	Roof and envelope dry-in	Roof structure, covering, windows and external doors	\$57,800.00	\$68,000.00	\$10,200.00
5	MEP rough-ins and wet trades	Electrical, plumbing, HVAC first fix, plastering, screeds	\$51,000.00	\$60,000.00	\$9,000.00
6	Internal finishes start	Ceilings, tiling, joinery manufacture, painting first coats	\$54,400.00	\$64,000.00	\$9,600.00
7	Fit-out and external works	Kitchen, bathrooms, paving, boundary works, services testing	\$56,950.00	\$67,000.00	\$10,050.00
8	Commissioning and defects	MEP commissioning, snag closure, landscaping, authority inspections	\$47,600.00	\$56,000.00	\$8,400.00
9	Handover and closeout	Final clean, manuals, as-builts, client training, occupation support	\$28,050.00	\$33,000.00	\$4,950.00

Monthly Cash Flow Curve

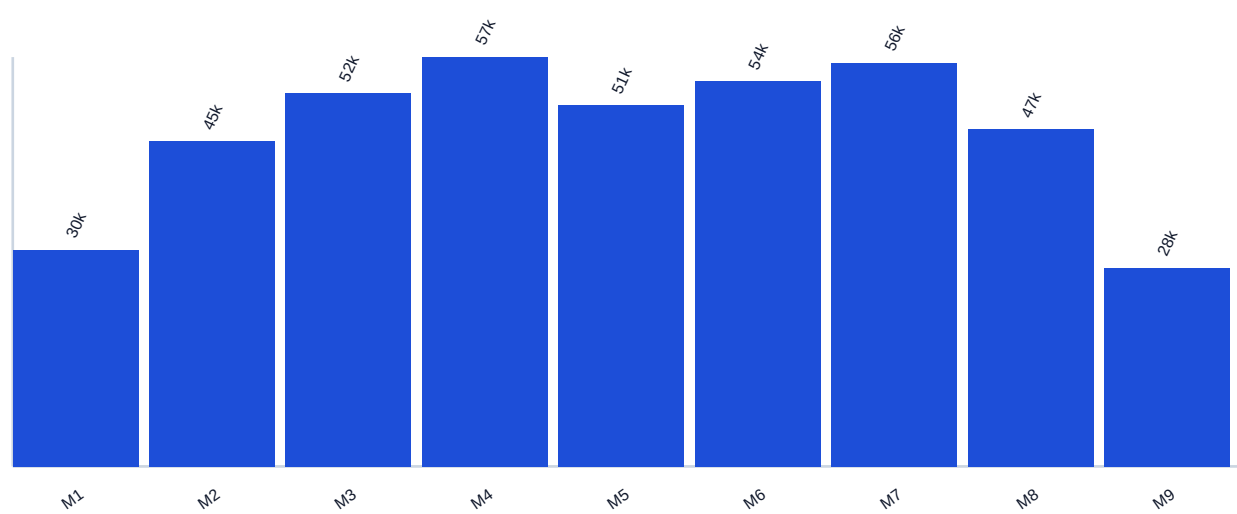

Cash-flow drawdown should be governed by certified progress, not merely calendar dates. Retain variation approval discipline before releasing provisional sums.

Weekly Execution Plan - Weeks 1 to 9

Week	Phase	Activities	Deliverables	Spend	Revenue	Profit
1	Mobilisation	Contract signing, kickoff, design freeze register, site possession	Approved weekly report W1, updated risk log, cost tracker, margin check	\$7,650.00	\$9,000.00	\$1,350.00
2	Mobilisation	Survey, geotechnical confirmation, site establishment, temporary utilities	Approved weekly report W2, updated risk log, cost tracker, margin check	\$7,650.00	\$9,000.00	\$1,350.00
3	Mobilisation	Long-lead procurement, shop drawing log, council/authority coordination	Approved weekly report W3, updated risk log, cost tracker, margin check	\$7,650.00	\$9,000.00	\$1,350.00
4	Mobilisation	Final mobilisation gate, safety induction, baseline programme approval	Approved weekly report W4, updated risk log, cost tracker, margin check	\$7,650.00	\$9,000.00	\$1,350.00
5	Groundworks	Clear site, strip topsoil, bulk earthworks, benching and compaction	Approved weekly report W5, updated risk log, cost tracker, margin check	\$11,475.00	\$13,500.00	\$2,025.00
6	Groundworks	Excavate foundations, inspect bearing, anti-termite treatment	Approved weekly report W6, updated risk log, cost tracker, margin check	\$11,475.00	\$13,500.00	\$2,025.00
7	Groundworks	Fix reinforcement, pour strip/pad foundations, cube tests	Approved weekly report W7, updated risk log, cost tracker, margin check	\$11,475.00	\$13,500.00	\$2,025.00
8	Groundworks	Backfill, compact, install underground drainage and sleeves	Approved weekly report W8, updated risk log, cost tracker, margin check	\$11,475.00	\$13,500.00	\$2,025.00
9	Substructure	Ground slab preparation, DPM, mesh, edge formwork	Approved weekly report W9, updated risk log, cost tracker, margin check	\$13,175.00	\$15,500.00	\$2,325.00

Weekly Execution Plan - Weeks 10 to 18

Week	Phase	Activities	Deliverables	Spend	Revenue	Profit
10	Substructure	Pour ground slab, cure, dimensional check, start wall materials staging	Approved weekly report W10, updated risk log, cost tracker, margin check	\$13,175.00	\$15,500.00	\$2,325.00
11	Superstructure	Masonry to lintel height, columns and service sleeves	Approved weekly report W11, updated risk log, cost tracker, margin check	\$13,175.00	\$15,500.00	\$2,325.00
12	Superstructure	Masonry to wall plate, ring beams, lintels, structural inspections	Approved weekly report W12, updated risk log, cost tracker, margin check	\$13,175.00	\$15,500.00	\$2,325.00
13	Superstructure	Roof truss fabrication verification, gables, parapets, steel inserts	Approved weekly report W13, updated risk log, cost tracker, margin check	\$14,450.00	\$17,000.00	\$2,550.00
14	Roofing	Install roof structure, bracing, fascia backing, rainwater goods prep	Approved weekly report W14, updated risk log, cost tracker, margin check	\$14,450.00	\$17,000.00	\$2,550.00
15	Roofing	Roof sheeting/tiles, insulation, flashings, gutters	Approved weekly report W15, updated risk log, cost tracker, margin check	\$14,450.00	\$17,000.00	\$2,550.00
16	Envelope	Install windows, external doors, waterproofing, dry-in certificate	Approved weekly report W16, updated risk log, cost tracker, margin check	\$14,450.00	\$17,000.00	\$2,550.00
17	MEP rough-in	Electrical conduits, plumbing first fix, drainage pressure testing	Approved weekly report W17, updated risk log, cost tracker, margin check	\$12,750.00	\$15,000.00	\$2,250.00
18	MEP rough-in	HVAC sleeves, data/security rough-in, wall chasing closure	Approved weekly report W18, updated risk log, cost tracker, margin check	\$12,750.00	\$15,000.00	\$2,250.00

Weekly Execution Plan - Weeks 19 to 27

Week	Phase	Activities	Deliverables	Spend	Revenue	Profit
19	Wet trades	Internal plastering, external render, screeds, waterproofing wet areas	Approved weekly report W19, updated risk log, cost tracker, margin check	\$12,750.00	\$15,000.00	\$2,250.00
20	Wet trades	Tiling substrate checks, ceiling framing, joinery site measures	Approved weekly report W20, updated risk log, cost tracker, margin check	\$12,750.00	\$15,000.00	\$2,250.00
21	Finishes	Ceilings and bulkheads, first paint coats, tile installation begins	Approved weekly report W21, updated risk log, cost tracker, margin check	\$13,600.00	\$16,000.00	\$2,400.00
22	Finishes	Floor and wall tiling, internal door frames, cabinetry manufacture	Approved weekly report W22, updated risk log, cost tracker, margin check	\$13,600.00	\$16,000.00	\$2,400.00
23	Finishes	Painting second coats, sanitaryware backing, joinery delivery	Approved weekly report W23, updated risk log, cost tracker, margin check	\$13,600.00	\$16,000.00	\$2,400.00
24	Finishes	Kitchen install, wardrobes, vanities, feature finishes	Approved weekly report W24, updated risk log, cost tracker, margin check	\$13,600.00	\$16,000.00	\$2,400.00
25	Fit-out	Electrical second fix, plumbing second fix, HVAC equipment install	Approved weekly report W25, updated risk log, cost tracker, margin check	\$14,237.50	\$16,750.00	\$2,512.50
26	Fit-out	Appliance install, lighting, switches, smart-home commissioning prep	Approved weekly report W26, updated risk log, cost tracker, margin check	\$14,237.50	\$16,750.00	\$2,512.50
27	External works	Driveway base, paving, boundary works, gates and site drainage	Approved weekly report W27, updated risk log, cost tracker, margin check	\$14,237.50	\$16,750.00	\$2,512.50

Weekly Execution Plan - Weeks 28 to 36

Week	Phase	Activities	Deliverables	Spend	Revenue	Profit
28	External works	Landscaping, irrigation, external lighting and final grading	Approved weekly report W28, updated risk log, cost tracker, margin check	\$14,237.50	\$16,750.00	\$2,512.50
29	Commissioning	MEP testing, pressure tests, insulation tests, equipment startup	Approved weekly report W29, updated risk log, cost tracker, margin check	\$11,900.00	\$14,000.00	\$2,100.00
30	Commissioning	Snagging round 1, quality inspections, client walkthrough 1	Approved weekly report W30, updated risk log, cost tracker, margin check	\$11,900.00	\$14,000.00	\$2,100.00
31	Commissioning	Snag closeout, deep clean phase 1, as-built markups	Approved weekly report W31, updated risk log, cost tracker, margin check	\$11,900.00	\$14,000.00	\$2,100.00
32	Commissioning	Authority inspections, occupancy readiness, client training draft	Approved weekly report W32, updated risk log, cost tracker, margin check	\$11,900.00	\$14,000.00	\$2,100.00
33	Handover	Final paint touchups, appliance manuals, attic/roof inspection	Approved weekly report W33, updated risk log, cost tracker, margin check	\$7,012.50	\$8,250.00	\$1,237.50
34	Handover	Client walkthrough 2, defects closure, warranties compilation	Approved weekly report W34, updated risk log, cost tracker, margin check	\$7,012.50	\$8,250.00	\$1,237.50
35	Handover	Final clean, occupation certificate support, keys and controls	Approved weekly report W35, updated risk log, cost tracker, margin check	\$7,012.50	\$8,250.00	\$1,237.50
36	Closeout	Final account, retention schedule, maintenance plan, lessons learned	Approved weekly report W36, updated risk log, cost tracker, margin check	\$7,012.50	\$8,250.00	\$1,237.50

Daily Execution Plan - Days 1 to 12

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
1	1	8	Mobilisation	Monday: Contract signing, kickoff, design freeze register, site possession. Plan crews, confirm materials, inspect previous work, release permits.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
2	1	8	Mobilisation	Tuesday: Contract signing, kickoff, design freeze register, site possession. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
3	1	8	Mobilisation	Wednesday: Contract signing, kickoff, design freeze register, site possession. Continue production, supervisor quality hold point, coordinate next trade.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
4	1	8	Mobilisation	Thursday: Contract signing, kickoff, design freeze register, site possession. Complete weekly production targets, test/inspect concealed work.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
5	1	8	Mobilisation	Friday: Contract signing, kickoff, design freeze register, site possession. Close snags, update programme, certify quantities, site clean and safety review.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
6	2	8	Mobilisation	Monday: Survey, geotechnical confirmation, site establishment, temporary utilities. Plan crews, confirm materials, inspect previous work, release permits.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
7	2	8	Mobilisation	Tuesday: Survey, geotechnical confirmation, site establishment, temporary utilities. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
8	2	8	Mobilisation	Wednesday: Survey, geotechnical confirmation, site establishment, temporary utilities. Continue production, supervisor quality hold point, coordinate next trade.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
9	2	8	Mobilisation	Thursday: Survey, geotechnical confirmation, site establishment, temporary utilities. Complete weekly production targets, test/inspect concealed work.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
10	2	8	Mobilisation	Friday: Survey, geotechnical confirmation, site establishment, temporary utilities. Close snags, update programme, certify quantities, site clean and safety review.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
11	3	8	Mobilisation	Monday: Long-lead procurement, shop drawing log, council/authority coordination. Plan crews, confirm materials, inspect previous work, release permits.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
12	3	8	Mobilisation	Tuesday: Long-lead procurement, shop drawing log, council/authority coordination. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off

Daily Execution Plan - Days 13 to 24

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
13	3	8	Mobilisation	Wednesday: Long-lead procurement, shop drawing log, council/authority coordination. Continue production, supervisor quality hold point, coordinate next trade.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
14	3	8	Mobilisation	Thursday: Long-lead procurement, shop drawing log, council/authority coordination. Complete weekly production targets, test/inspect concealed work.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
15	3	8	Mobilisation	Friday: Long-lead procurement, shop drawing log, council/authority coordination. Close snags, update programme, certify quantities, site clean and safety review.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
16	4	8	Mobilisation	Monday: Final mobilisation gate, safety induction, baseline programme approval. Plan crews, confirm materials, inspect previous work, release permits.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
17	4	8	Mobilisation	Tuesday: Final mobilisation gate, safety induction, baseline programme approval. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
18	4	8	Mobilisation	Wednesday: Final mobilisation gate, safety induction, baseline programme approval. Continue production, supervisor quality hold point, coordinate next trade.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
19	4	8	Mobilisation	Thursday: Final mobilisation gate, safety induction, baseline programme approval. Complete weekly production targets, test/inspect concealed work.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
20	4	8	Mobilisation	Friday: Final mobilisation gate, safety induction, baseline programme approval. Close snags, update programme, certify quantities, site clean and safety review.	\$1,530.00	\$270.00	Daily diary, HSE checklist, photo record, foreman sign-off
21	5	8	Groundworks	Monday: Clear site, strip topsoil, bulk earthworks, benching and compaction. Plan crews, confirm materials, inspect previous work, release permits.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
22	5	8	Groundworks	Tuesday: Clear site, strip topsoil, bulk earthworks, benching and compaction. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
23	5	8	Groundworks	Wednesday: Clear site, strip topsoil, bulk earthworks, benching and compaction. Continue production, supervisor quality hold point, coordinate next trade.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
24	5	8	Groundworks	Thursday: Clear site, strip topsoil, bulk earthworks, benching and compaction. Complete weekly production targets, test/inspect concealed work.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off

Daily Execution Plan - Days 25 to 36

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
25	5	8	Groundworks	Friday: Clear site, strip topsoil, bulk earthworks, benching and compaction. Close snags, update programme, certify quantities, site clean and safety review.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
26	6	8	Groundworks	Monday: Excavate foundations, inspect bearing, anti-termite treatment. Plan crews, confirm materials, inspect previous work, release permits.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
27	6	8	Groundworks	Tuesday: Excavate foundations, inspect bearing, anti-termite treatment. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
28	6	8	Groundworks	Wednesday: Excavate foundations, inspect bearing, anti-termite treatment. Continue production, supervisor quality hold point, coordinate next trade.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
29	6	8	Groundworks	Thursday: Excavate foundations, inspect bearing, anti-termite treatment. Complete weekly production targets, test/inspect concealed work.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
30	6	8	Groundworks	Friday: Excavate foundations, inspect bearing, anti-termite treatment. Close snags, update programme, certify quantities, site clean and safety review.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
31	7	8	Groundworks	Monday: Fix reinforcement, pour strip/pad foundations, cube tests. Plan crews, confirm materials, inspect previous work, release permits.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
32	7	8	Groundworks	Tuesday: Fix reinforcement, pour strip/pad foundations, cube tests. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
33	7	8	Groundworks	Wednesday: Fix reinforcement, pour strip/pad foundations, cube tests. Continue production, supervisor quality hold point, coordinate next trade.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
34	7	8	Groundworks	Thursday: Fix reinforcement, pour strip/pad foundations, cube tests. Complete weekly production targets, test/inspect concealed work.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
35	7	8	Groundworks	Friday: Fix reinforcement, pour strip/pad foundations, cube tests. Close snags, update programme, certify quantities, site clean and safety review.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
36	8	8	Groundworks	Monday: Backfill, compact, install underground drainage and sleeves. Plan crews, confirm materials, inspect previous work, release permits.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off

Daily Execution Plan - Days 37 to 48

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
37	8	8	Groundworks	Tuesday: Backfill, compact, install underground drainage and sleeves. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
38	8	8	Groundworks	Wednesday: Backfill, compact, install underground drainage and sleeves. Continue production, supervisor quality hold point, coordinate next trade.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
39	8	8	Groundworks	Thursday: Backfill, compact, install underground drainage and sleeves. Complete weekly production targets, test/inspect concealed work.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
40	8	8	Groundworks	Friday: Backfill, compact, install underground drainage and sleeves. Close snags, update programme, certify quantities, site clean and safety review.	\$2,295.00	\$405.00	Daily diary, HSE checklist, photo record, foreman sign-off
41	9	8	Substructure	Monday: Ground slab preparation, DPM, mesh, edge formwork. Plan crews, confirm materials, inspect previous work, release permits.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
42	9	8	Substructure	Tuesday: Ground slab preparation, DPM, mesh, edge formwork. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
43	9	8	Substructure	Wednesday: Ground slab preparation, DPM, mesh, edge formwork. Continue production, supervisor quality hold point, coordinate next trade.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
44	9	8	Substructure	Thursday: Ground slab preparation, DPM, mesh, edge formwork. Complete weekly production targets, test/inspect concealed work.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
45	9	8	Substructure	Friday: Ground slab preparation, DPM, mesh, edge formwork. Close snags, update programme, certify quantities, site clean and safety review.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
46	10	8	Substructure	Monday: Pour ground slab, cure, dimensional check, start wall materials staging. Plan crews, confirm materials, inspect previous work, release permits.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
47	10	8	Substructure	Tuesday: Pour ground slab, cure, dimensional check, start wall materials staging. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
48	10	8	Substructure	Wednesday: Pour ground slab, cure, dimensional check, start wall materials staging. Continue production, supervisor quality hold point, coordinate next trade.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off

Daily Execution Plan - Days 49 to 60

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
49	10	8	Substructure	Thursday: Pour ground slab, cure, dimensional check, start wall materials staging. Complete weekly production targets, test/inspect concealed work.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
50	10	8	Substructure	Friday: Pour ground slab, cure, dimensional check, start wall materials staging. Close snags, update programme, certify quantities, site clean and safety review.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
51	11	8	Superstructure	Monday: Masonry to lintel height, columns and service sleeves. Plan crews, confirm materials, inspect previous work, release permits.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
52	11	8	Superstructure	Tuesday: Masonry to lintel height, columns and service sleeves. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
53	11	8	Superstructure	Wednesday: Masonry to lintel height, columns and service sleeves. Continue production, supervisor quality hold point, coordinate next trade.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
54	11	8	Superstructure	Thursday: Masonry to lintel height, columns and service sleeves. Complete weekly production targets, test/inspect concealed work.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
55	11	8	Superstructure	Friday: Masonry to lintel height, columns and service sleeves. Close snags, update programme, certify quantities, site clean and safety review.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
56	12	8	Superstructure	Monday: Masonry to wall plate, ring beams, lintels, structural inspections. Plan crews, confirm materials, inspect previous work, release permits.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
57	12	8	Superstructure	Tuesday: Masonry to wall plate, ring beams, lintels, structural inspections. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
58	12	8	Superstructure	Wednesday: Masonry to wall plate, ring beams, lintels, structural inspections. Continue production, supervisor quality hold point, coordinate next trade.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
59	12	8	Superstructure	Thursday: Masonry to wall plate, ring beams, lintels, structural inspections. Complete weekly production targets, test/inspect concealed work.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off
60	12	8	Superstructure	Friday: Masonry to wall plate, ring beams, lintels, structural inspections. Close snags, update programme, certify quantities, site clean and safety review.	\$2,635.00	\$465.00	Daily diary, HSE checklist, photo record, foreman sign-off

Daily Execution Plan - Days 61 to 72

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
61	13	8	Superstructure	Monday: Roof truss fabrication verification, gables, parapets, steel inserts. Plan crews, confirm materials, inspect previous work, release permits.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
62	13	8	Superstructure	Tuesday: Roof truss fabrication verification, gables, parapets, steel inserts. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
63	13	8	Superstructure	Wednesday: Roof truss fabrication verification, gables, parapets, steel inserts. Continue production, supervisor quality hold point, coordinate next trade.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
64	13	8	Superstructure	Thursday: Roof truss fabrication verification, gables, parapets, steel inserts. Complete weekly production targets, test/inspect concealed work.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
65	13	8	Superstructure	Friday: Roof truss fabrication verification, gables, parapets, steel inserts. Close snags, update programme, certify quantities, site clean and safety review.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
66	14	8	Roofing	Monday: Install roof structure, bracing, fascia backing, rainwater goods prep. Plan crews, confirm materials, inspect previous work, release permits.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
67	14	8	Roofing	Tuesday: Install roof structure, bracing, fascia backing, rainwater goods prep. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
68	14	8	Roofing	Wednesday: Install roof structure, bracing, fascia backing, rainwater goods prep. Continue production, supervisor quality hold point, coordinate next trade.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
69	14	8	Roofing	Thursday: Install roof structure, bracing, fascia backing, rainwater goods prep. Complete weekly production targets, test/inspect concealed work.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
70	14	8	Roofing	Friday: Install roof structure, bracing, fascia backing, rainwater goods prep. Close snags, update programme, certify quantities, site clean and safety review.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
71	15	8	Roofing	Monday: Roof sheeting/tiles, insulation, flashings, gutters. Plan crews, confirm materials, inspect previous work, release permits.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
72	15	8	Roofing	Tuesday: Roof sheeting/tiles, insulation, flashings, gutters. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off

Daily Execution Plan - Days 73 to 84

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
73	15	8	Roofing	Wednesday: Roof sheeting/tiles, insulation, flashings, gutters. Continue production, supervisor quality hold point, coordinate next trade.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
74	15	8	Roofing	Thursday: Roof sheeting/tiles, insulation, flashings, gutters. Complete weekly production targets, test/inspect concealed work.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
75	15	8	Roofing	Friday: Roof sheeting/tiles, insulation, flashings, gutters. Close snags, update programme, certify quantities, site clean and safety review.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
76	16	8	Envelope	Monday: Install windows, external doors, waterproofing, dry-in certificate. Plan crews, confirm materials, inspect previous work, release permits.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
77	16	8	Envelope	Tuesday: Install windows, external doors, waterproofing, dry-in certificate. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
78	16	8	Envelope	Wednesday: Install windows, external doors, waterproofing, dry-in certificate. Continue production, supervisor quality hold point, coordinate next trade.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
79	16	8	Envelope	Thursday: Install windows, external doors, waterproofing, dry-in certificate. Complete weekly production targets, test/inspect concealed work.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
80	16	8	Envelope	Friday: Install windows, external doors, waterproofing, dry-in certificate. Close snags, update programme, certify quantities, site clean and safety review.	\$2,890.00	\$510.00	Daily diary, HSE checklist, photo record, foreman sign-off
81	17	8	MEP rough-in	Monday: Electrical conduits, plumbing first fix, drainage pressure testing. Plan crews, confirm materials, inspect previous work, release permits.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
82	17	8	MEP rough-in	Tuesday: Electrical conduits, plumbing first fix, drainage pressure testing. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
83	17	8	MEP rough-in	Wednesday: Electrical conduits, plumbing first fix, drainage pressure testing. Continue production, supervisor quality hold point, coordinate next trade.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
84	17	8	MEP rough-in	Thursday: Electrical conduits, plumbing first fix, drainage pressure testing. Complete weekly production targets, test/inspect concealed work.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off

Daily Execution Plan - Days 85 to 96

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
85	17	8	MEP rough-in	Friday: Electrical conduits, plumbing first fix, drainage pressure testing. Close snags, update programme, certify quantities, site clean and safety review.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
86	18	8	MEP rough-in	Monday: HVAC sleeves, data/security rough-in, wall chasing closure. Plan crews, confirm materials, inspect previous work, release permits.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
87	18	8	MEP rough-in	Tuesday: HVAC sleeves, data/security rough-in, wall chasing closure. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
88	18	8	MEP rough-in	Wednesday: HVAC sleeves, data/security rough-in, wall chasing closure. Continue production, supervisor quality hold point, coordinate next trade.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
89	18	8	MEP rough-in	Thursday: HVAC sleeves, data/security rough-in, wall chasing closure. Complete weekly production targets, test/inspect concealed work.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
90	18	8	MEP rough-in	Friday: HVAC sleeves, data/security rough-in, wall chasing closure. Close snags, update programme, certify quantities, site clean and safety review.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
91	19	8	Wet trades	Monday: Internal plastering, external render, screeds, waterproofing wet areas. Plan crews, confirm materials, inspect previous work, release permits.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
92	19	8	Wet trades	Tuesday: Internal plastering, external render, screeds, waterproofing wet areas. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
93	19	8	Wet trades	Wednesday: Internal plastering, external render, screeds, waterproofing wet areas. Continue production, supervisor quality hold point, coordinate next trade.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
94	19	8	Wet trades	Thursday: Internal plastering, external render, screeds, waterproofing wet areas. Complete weekly production targets, test/inspect concealed work.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
95	19	8	Wet trades	Friday: Internal plastering, external render, screeds, waterproofing wet areas. Close snags, update programme, certify quantities, site clean and safety review.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
96	20	8	Wet trades	Monday: Tiling substrate checks, ceiling framing, joinery site measures. Plan crews, confirm materials, inspect previous work, release permits.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off

Daily Execution Plan - Days 97 to 108

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
97	20	8	Wet trades	Tuesday: Tiling substrate checks, ceiling framing, joinery site measures. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
98	20	8	Wet trades	Wednesday: Tiling substrate checks, ceiling framing, joinery site measures. Continue production, supervisor quality hold point, coordinate next trade.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
99	20	8	Wet trades	Thursday: Tiling substrate checks, ceiling framing, joinery site measures. Complete weekly production targets, test/inspect concealed work.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
100	20	8	Wet trades	Friday: Tiling substrate checks, ceiling framing, joinery site measures. Close snags, update programme, certify quantities, site clean and safety review.	\$2,550.00	\$450.00	Daily diary, HSE checklist, photo record, foreman sign-off
101	21	8	Finishes	Monday: Ceilings and bulkheads, first paint coats, tile installation begins. Plan crews, confirm materials, inspect previous work, release permits.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
102	21	8	Finishes	Tuesday: Ceilings and bulkheads, first paint coats, tile installation begins. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
103	21	8	Finishes	Wednesday: Ceilings and bulkheads, first paint coats, tile installation begins. Continue production, supervisor quality hold point, coordinate next trade.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
104	21	8	Finishes	Thursday: Ceilings and bulkheads, first paint coats, tile installation begins. Complete weekly production targets, test/inspect concealed work.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
105	21	8	Finishes	Friday: Ceilings and bulkheads, first paint coats, tile installation begins. Close snags, update programme, certify quantities, site clean and safety review.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
106	22	8	Finishes	Monday: Floor and wall tiling, internal door frames, cabinetry manufacture. Plan crews, confirm materials, inspect previous work, release permits.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
107	22	8	Finishes	Tuesday: Floor and wall tiling, internal door frames, cabinetry manufacture. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
108	22	8	Finishes	Wednesday: Floor and wall tiling, internal door frames, cabinetry manufacture. Continue production, supervisor quality hold point, coordinate next trade.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off

Daily Execution Plan - Days 109 to 120

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
109	22	8	Finishes	Thursday: Floor and wall tiling, internal door frames, cabinetry manufacture. Complete weekly production targets, test/inspect concealed work.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
110	22	8	Finishes	Friday: Floor and wall tiling, internal door frames, cabinetry manufacture. Close snags, update programme, certify quantities, site clean and safety review.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
111	23	8	Finishes	Monday: Painting second coats, sanitaryware backing, joinery delivery. Plan crews, confirm materials, inspect previous work, release permits.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
112	23	8	Finishes	Tuesday: Painting second coats, sanitaryware backing, joinery delivery. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
113	23	8	Finishes	Wednesday: Painting second coats, sanitaryware backing, joinery delivery. Continue production, supervisor quality hold point, coordinate next trade.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
114	23	8	Finishes	Thursday: Painting second coats, sanitaryware backing, joinery delivery. Complete weekly production targets, test/inspect concealed work.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
115	23	8	Finishes	Friday: Painting second coats, sanitaryware backing, joinery delivery. Close snags, update programme, certify quantities, site clean and safety review.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
116	24	8	Finishes	Monday: Kitchen install, wardrobes, vanities, feature finishes. Plan crews, confirm materials, inspect previous work, release permits.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
117	24	8	Finishes	Tuesday: Kitchen install, wardrobes, vanities, feature finishes. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
118	24	8	Finishes	Wednesday: Kitchen install, wardrobes, vanities, feature finishes. Continue production, supervisor quality hold point, coordinate next trade.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
119	24	8	Finishes	Thursday: Kitchen install, wardrobes, vanities, feature finishes. Complete weekly production targets, test/inspect concealed work.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off
120	24	8	Finishes	Friday: Kitchen install, wardrobes, vanities, feature finishes. Close snags, update programme, certify quantities, site clean and safety review.	\$2,720.00	\$480.00	Daily diary, HSE checklist, photo record, foreman sign-off

Daily Execution Plan - Days 121 to 132

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
121	25	8	Fit-out	Monday: Electrical second fix, plumbing second fix, HVAC equipment install. Plan crews, confirm materials, inspect previous work, release permits.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
122	25	8	Fit-out	Tuesday: Electrical second fix, plumbing second fix, HVAC equipment install. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
123	25	8	Fit-out	Wednesday: Electrical second fix, plumbing second fix, HVAC equipment install. Continue production, supervisor quality hold point, coordinate next trade.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
124	25	8	Fit-out	Thursday: Electrical second fix, plumbing second fix, HVAC equipment install. Complete weekly production targets, test/inspect concealed work.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
125	25	8	Fit-out	Friday: Electrical second fix, plumbing second fix, HVAC equipment install. Close snags, update programme, certify quantities, site clean and safety review.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
126	26	8	Fit-out	Monday: Appliance install, lighting, switches, smart-home commissioning prep. Plan crews, confirm materials, inspect previous work, release permits.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
127	26	8	Fit-out	Tuesday: Appliance install, lighting, switches, smart-home commissioning prep. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
128	26	8	Fit-out	Wednesday: Appliance install, lighting, switches, smart-home commissioning prep. Continue production, supervisor quality hold point, coordinate next trade.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
129	26	8	Fit-out	Thursday: Appliance install, lighting, switches, smart-home commissioning prep. Complete weekly production targets, test/inspect concealed work.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
130	26	8	Fit-out	Friday: Appliance install, lighting, switches, smart-home commissioning prep. Close snags, update programme, certify quantities, site clean and safety review.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
131	27	8	External works	Monday: Driveway base, paving, boundary works, gates and site drainage. Plan crews, confirm materials, inspect previous work, release permits.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
132	27	8	External works	Tuesday: Driveway base, paving, boundary works, gates and site drainage. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off

Daily Execution Plan - Days 133 to 144

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
133	27	8	External works	Wednesday: Driveway base, paving, boundary works, gates and site drainage. Continue production, supervisor quality hold point, coordinate next trade.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
134	27	8	External works	Thursday: Driveway base, paving, boundary works, gates and site drainage. Complete weekly production targets, test/inspect concealed work.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
135	27	8	External works	Friday: Driveway base, paving, boundary works, gates and site drainage. Close snags, update programme, certify quantities, site clean and safety review.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
136	28	8	External works	Monday: Landscaping, irrigation, external lighting and final grading. Plan crews, confirm materials, inspect previous work, release permits.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
137	28	8	External works	Tuesday: Landscaping, irrigation, external lighting and final grading. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
138	28	8	External works	Wednesday: Landscaping, irrigation, external lighting and final grading. Continue production, supervisor quality hold point, coordinate next trade.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
139	28	8	External works	Thursday: Landscaping, irrigation, external lighting and final grading. Complete weekly production targets, test/inspect concealed work.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
140	28	8	External works	Friday: Landscaping, irrigation, external lighting and final grading. Close snags, update programme, certify quantities, site clean and safety review.	\$2,847.50	\$502.50	Daily diary, HSE checklist, photo record, foreman sign-off
141	29	8	Commissioning	Monday: MEP testing, pressure tests, insulation tests, equipment startup. Plan crews, confirm materials, inspect previous work, release permits.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
142	29	8	Commissioning	Tuesday: MEP testing, pressure tests, insulation tests, equipment startup. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
143	29	8	Commissioning	Wednesday: MEP testing, pressure tests, insulation tests, equipment startup. Continue production, supervisor quality hold point, coordinate next trade.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
144	29	8	Commissioning	Thursday: MEP testing, pressure tests, insulation tests, equipment startup. Complete weekly production targets, test/inspect concealed work.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off

Daily Execution Plan - Days 145 to 156

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
145	29	8	Commissioning	Friday: MEP testing, pressure tests, insulation tests, equipment startup. Close snags, update programme, certify quantities, site clean and safety review.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
146	30	8	Commissioning	Monday: Snagging round 1, quality inspections, client walkthrough 1. Plan crews, confirm materials, inspect previous work, release permits.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
147	30	8	Commissioning	Tuesday: Snagging round 1, quality inspections, client walkthrough 1. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
148	30	8	Commissioning	Wednesday: Snagging round 1, quality inspections, client walkthrough 1. Continue production, supervisor quality hold point, coordinate next trade.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
149	30	8	Commissioning	Thursday: Snagging round 1, quality inspections, client walkthrough 1. Complete weekly production targets, test/inspect concealed work.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
150	30	8	Commissioning	Friday: Snagging round 1, quality inspections, client walkthrough 1. Close snags, update programme, certify quantities, site clean and safety review.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
151	31	8	Commissioning	Monday: Snag closeout, deep clean phase 1, as-built markups. Plan crews, confirm materials, inspect previous work, release permits.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
152	31	8	Commissioning	Tuesday: Snag closeout, deep clean phase 1, as-built markups. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
153	31	8	Commissioning	Wednesday: Snag closeout, deep clean phase 1, as-built markups. Continue production, supervisor quality hold point, coordinate next trade.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
154	31	8	Commissioning	Thursday: Snag closeout, deep clean phase 1, as-built markups. Complete weekly production targets, test/inspect concealed work.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
155	31	8	Commissioning	Friday: Snag closeout, deep clean phase 1, as-built markups. Close snags, update programme, certify quantities, site clean and safety review.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
156	32	8	Commissioning	Monday: Authority inspections, occupancy readiness, client training draft. Plan crews, confirm materials, inspect previous work, release permits.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off

Daily Execution Plan - Days 157 to 168

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
157	32	8	Commissioning	Tuesday: Authority inspections, occupancy readiness, client training draft. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
158	32	8	Commissioning	Wednesday: Authority inspections, occupancy readiness, client training draft. Continue production, supervisor quality hold point, coordinate next trade.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
159	32	8	Commissioning	Thursday: Authority inspections, occupancy readiness, client training draft. Complete weekly production targets, test/inspect concealed work.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
160	32	8	Commissioning	Friday: Authority inspections, occupancy readiness, client training draft. Close snags, update programme, certify quantities, site clean and safety review.	\$2,380.00	\$420.00	Daily diary, HSE checklist, photo record, foreman sign-off
161	33	8	Handover	Monday: Final paint touchups, appliance manuals, attic/roof inspection. Plan crews, confirm materials, inspect previous work, release permits.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
162	33	8	Handover	Tuesday: Final paint touchups, appliance manuals, attic/roof inspection. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
163	33	8	Handover	Wednesday: Final paint touchups, appliance manuals, attic/roof inspection. Continue production, supervisor quality hold point, coordinate next trade.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
164	33	8	Handover	Thursday: Final paint touchups, appliance manuals, attic/roof inspection. Complete weekly production targets, test/inspect concealed work.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
165	33	8	Handover	Friday: Final paint touchups, appliance manuals, attic/roof inspection. Close snags, update programme, certify quantities, site clean and safety review.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
166	34	8	Handover	Monday: Client walkthrough 2, defects closure, warranties compilation. Plan crews, confirm materials, inspect previous work, release permits.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
167	34	8	Handover	Tuesday: Client walkthrough 2, defects closure, warranties compilation. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
168	34	8	Handover	Wednesday: Client walkthrough 2, defects closure, warranties compilation. Continue production, supervisor quality hold point, coordinate next trade.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off

Daily Execution Plan - Days 169 to 180

Day	Week	Hr	Phase	Activities	Spend	Profit	Control
169	34	8	Handover	Thursday: Client walkthrough 2, defects closure, warranties compilation. Complete weekly production targets, test/inspect concealed work.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
170	34	8	Handover	Friday: Client walkthrough 2, defects closure, warranties compilation. Close snags, update programme, certify quantities, site clean and safety review.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
171	35	8	Handover	Monday: Final clean, occupation certificate support, keys and controls. Plan crews, confirm materials, inspect previous work, release permits.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
172	35	8	Handover	Tuesday: Final clean, occupation certificate support, keys and controls. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
173	35	8	Handover	Wednesday: Final clean, occupation certificate support, keys and controls. Continue production, supervisor quality hold point, coordinate next trade.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
174	35	8	Handover	Thursday: Final clean, occupation certificate support, keys and controls. Complete weekly production targets, test/inspect concealed work.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
175	35	8	Handover	Friday: Final clean, occupation certificate support, keys and controls. Close snags, update programme, certify quantities, site clean and safety review.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
176	36	8	Closeout	Monday: Final account, retention schedule, maintenance plan, lessons learned. Plan crews, confirm materials, inspect previous work, release permits.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
177	36	8	Closeout	Tuesday: Final account, retention schedule, maintenance plan, lessons learned. Execute primary trade package, update drawings/RFIs, verify dimensions.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
178	36	8	Closeout	Wednesday: Final account, retention schedule, maintenance plan, lessons learned. Continue production, supervisor quality hold point, coordinate next trade.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
179	36	8	Closeout	Thursday: Final account, retention schedule, maintenance plan, lessons learned. Complete weekly production targets, test/inspect concealed work.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off
180	36	8	Closeout	Friday: Final account, retention schedule, maintenance plan, lessons learned. Close snags, update programme, certify quantities, site clean and safety review.	\$1,402.50	\$247.50	Daily diary, HSE checklist, photo record, foreman sign-off

Commercial Risk Scenarios - Set 1

Scenario	What can happen	Margin-safe response
Abnormal ground	Rock, soft spots, collapsible soil, groundwater or unsuitable bearing appears.	Stop affected work, issue site instruction, measure quantities, engineer direction, price variation before proceeding beyond making safe.
Client upgrades finishes	Client selects higher-grade tiles, sanitaryware, kitchen, lighting or appliances.	Use allowance register. Quote delta plus time impact. No procurement before signed variation and deposit.
Design information late	Drawings, structural details, window schedules or MEP layouts arrive late.	Record delay notice, protect programme float, resequence only if no cost impact, otherwise quote acceleration or standing time.
Authority approval delay	Permit, inspection or occupation approval slips.	Separate authority delay from contractor delay. Keep evidence log and revise handover date if critical path is affected.
Material price escalation	Cement, steel, aluminium, fuel, imported finishes or exchange rates move.	Lock prices with supplier validity, include escalation clause after quote validity, require reprice after validity expiry.
Supplier failure	Supplier misses delivery, delivers wrong spec, or quality fails.	Use approved supplier list, retain purchase terms, back-charge if applicable, keep second-source options for critical items.

Commercial Risk Scenarios - Set 2

Scenario	What can happen	Margin-safe response
Labour productivity loss	Crew output below plan due to congestion, rework, absenteeism or supervision gaps.	Daily productivity review, zone control, remove blockers, do not add overtime without approved recovery budget.
Weather disruption	Rain affects earthworks, roofing, external works or curing.	Record weather days with photos, protect works, claim EOT where contract allows, avoid absorbing delay costs.
Hidden services	Unknown pipes, cables, septic systems, drains or boundary conflicts discovered.	Stop, mark, protect, notify client, price diversion/remediation before continuing.
Quality defect/rework	Work fails inspection or client rejects finish.	Identify cause. Contractor-caused rework is internal cost. Client/spec change is variation. Supplier defect is back-charge.
Cash-flow late payment	Client delays milestone payment.	Suspend procurement for next packages where contract allows, issue notice, protect supplier payments and demobilisation rights.
Security/theft	Material, tools, fittings or fuel stolen.	Secure high-value deliveries, just-in-time delivery, access log, insurance report, client-funded extra security if risk increases.

Commercial Risk Scenarios - Set 3

Scenario	What can happen	Margin-safe response
Scope creep by instruction	Verbal instruction adds small extras repeatedly.	No verbal free work. Convert every instruction to written RFI/VO, even if value is small.
Acceleration demand	Client asks for earlier completion.	Quote acceleration separately: overtime, extra crews, supervision, logistics, quality risk and disruption premium.
Late client decisions	Paint, tile, cabinetry, appliance or fixture choices are late.	Decision schedule controls. Late decision shifts procurement and completion dates unless acceleration is paid.
Neighbour/community issue	Noise, access, dust, traffic or boundary complaints disrupt work.	Community control plan, working hours, dust/noise mitigation, variation if restrictions exceed baseline.
Health and safety incident	Injury, near miss, unsafe condition or regulatory intervention.	Stop work, make safe, investigate, notify, corrective action. Do not restart until controls are verified.
Practical completion dispute	Client wants occupation but defects or documents remain open.	Use signed snag list, define practical completion, retain defects liability process, separate occupation from free extra work.

Procurement Strategy

Item	Detail
Long-lead packages	Roof covering, aluminium glazing, kitchen appliances, sanitaryware, specialty lighting, gate automation, HVAC equipment, and smart-home components.
Procurement gates	Issue RFQs in weeks 1-3, award long-lead items by week 4, confirm shop drawings by week 8, stage deliveries from week 14 onward.
Supplier controls	Use three-quote comparison, technical compliance sheet, warranty review, payment controls, and delivery inspection before acceptance.
Substitution control	No substitution without client approval, technical compliance confirmation, cost impact, lead-time impact, and warranty confirmation.

Resource Plan

Item	Detail
Management	Project manager, site foreman, quantity surveyor, procurement lead, HSE officer visiting, QA inspector visiting.
Core crews	Earthworks crew, concrete crew, masonry crew, roofing crew, MEP subcontractors, finishes crews, external works crew, cleaning/closeout crew.
Equipment	TLB/excavator, compactor, concrete poker, scaffolding, hoists, small tools, testing equipment, temporary power and water.
Peak manpower	Expected peak is 32-42 people during MEP rough-in and finishes overlap. Crew stacking must be controlled through daily work zones.

Risk Register

Item	Detail
Ground conditions	Risk: abnormal soil or rock. Mitigation: geotechnical confirmation, provisional excavation allowance, early foundation inspection.
Client finish upgrades	Risk: budget overrun. Mitigation: approved finishes schedule, allowance register, variation approval before purchase.
Material lead times	Risk: programme delay. Mitigation: long-lead procurement by week 4 and weekly expediting.
Weather	Risk: earthworks, roofing and external works disruption. Mitigation: weather float, temporary protection, sequence dry-in quickly.
Quality rework	Risk: cost and time loss. Mitigation: hold points, mockups, first-off approvals, daily photo records.
Cash-flow delay	Risk: supplier/crew disruption. Mitigation: certified milestones, payment calendar, retention schedule.

QA, HSE and Inspection Plan

Item	Detail
Daily	Toolbox talk, housekeeping check, PPE compliance, workface permit review, daily diary and photo register.
Weekly	Programme update, quantity certification, safety walkdown, quality snag list, procurement tracker review.
Hold points	Foundation bearing, reinforcement before pour, slab DPM/mesh, concealed MEP, waterproofing flood test, roof dry-in, final commissioning.
Testing	Concrete cube tests, compaction checks, pressure tests, insulation resistance tests, drainage flow tests, appliance commissioning.
Closeout	As-built drawings, warranties, manuals, compliance certificates, keys, access codes, maintenance plan, defects liability log.

Client Decision Schedule

Item	Detail
Before week 1	Approve design, budget cap, contract, finishes allowance, payment plan, authority route, and communication protocol.
Week 2	Approve windows, external doors, roof finish, sanitaryware direction, kitchen design brief.
Week 6	Approve electrical point schedule, lighting concept, smart-home scope, tile ranges.
Week 12	Approve cabinetry drawings, paint palette, feature finishes, landscape brief.
Week 22	Approve appliances, ironmongery, final fittings, handover format.

Payment Milestone Proposal

Item	Detail
10% mobilisation	Contract signature, insurance, site setup, procurement launch.
15% foundations complete	Excavations, foundation pour, backfill and underground sleeves complete.
20% shell complete	Walls, columns, beams and roof support complete.
15% roof and envelope	Roof complete, windows/doors installed, building dry-in achieved.
15% MEP and wet trades	First fix, plastering, screeds and waterproofing complete.
15% finishes and fit-out	Tiles, paint, joinery, kitchen, sanitaryware, electrical/plumbing second fix.
8% commissioning	Testing, snagging, authority inspection support, final clean.
2% closeout	Handover documents, manuals, keys, final account. Retention can be held separately.

Handover Deliverables

Item	Detail
Commercial	Final account, variation register, payment certificate summary, retention schedule, asset list.
Technical	As-built drawings, inspection and test plan, test certificates, commissioning records, material data sheets.
Client pack	Operating manuals, warranties, maintenance schedule, emergency contacts, keys/access devices, defects reporting procedure.
Post-handover	30-day check-in, 90-day seasonal inspection, defects liability closeout, maintenance advice.

Appendix - Simulation Data Summary

Metric	Value
Project reference	SNC-HOUSE-500K-001
Budget cap	\$500,000.00
Required margin	15.0%
Protected gross profit	\$75,000.00
Maximum internal cost	\$425,000.00
BOQ line count	28
Material package count	17
Schedule scenarios	3
Weekly plan count	36
Daily plan count	180
Quotation total	\$500,000.00